


ASSEMBLY MANUAL >

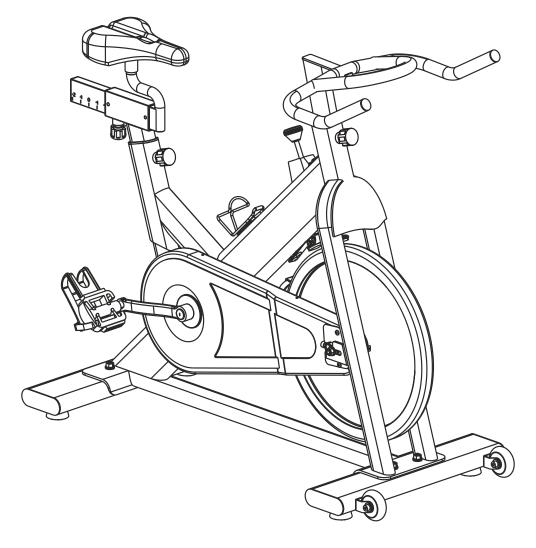

Pershing

Record serial number

Elite Pershing Spin bike

Thank you for purchasing the Elite Pershing Spin bike.

For over 20 years, Elite Fitness[™] has been New Zealand's largest supplier of fitness equipment. Our aim and vision is to provide you Elite[™] branded products, tested to the highest standard for quality and biomechanics at the best possible price.

Please read through this manual to familiarise yourself with the operation of your new **Elite Pershing Spin bike.** Doing so will help to insure that you get the most out of your machine, enjoying safe and effective workouts ahead.

Even though we go to great efforts to ensure the quality of each product we produce, occasional errors and or omissions do occur. In any event should you find this product to have either a defective or a missing part, please contact us for a replacement.

SERVICE & WARRANTY

For service and warranty assistance please visit: **www.elitefitness.co.nz/service** Online forms are available for Service, Warranty and Parts requests. (09) 258 9067

Elite Fitness HQ

11 George Bourke Drive Mt Wellington Auckland, New Zealand

info@elitefitness.co.nz 0800 2 438 348 www.elitefitness.co.nz

CONTENTS

Important Safety Instructions	3	Limited Warranty	13
Product Specifications	4	Warm-Up Exercise	14
Assembly Instructions	5	Training Stages	15
Setting your Spin Bike Up	9	Parts	16
Care and Maintence	11	Parts List	17
Maintenance Log	12	Exploded Drawing	18

IMPORTANT SAFETY INSTRUCTIONS

The following definition applied to the word "WARNING" when used in this manual:



Used to call attention to POTENTIAL hazards that could result in personal injury or loss of life.

READ ALL INSTRUCTIONS BEFORE USING THE MACHINE

This product has been designed for home use only. Product liability and warranty conditions will not be applicable to products being subjected to professional use or products being used in a commercial environment. e.g Gym Centre

This exercise machine is built for optimum safety. However, certain precautions apply whenever you operate a piece of exercise equipment. Be sure read the entire manual before you assemble or operate your machine. In particular, note the following safety precautions.

- Read all instructions in this manual before using this equipment.
- Use the machine only for its intended use as described in this Manual.
- Inspect and tighten all the loose parts before this equipment is used.
- Keeps hands away from moving parts.
- Keep children and pets away from the machine at all time. DO NOT leave children unattended in the same room with the machine.
- Before using the machine to exercise, always do stretching exercises to properly warm up.
- Inspect the machine before each use; make sure all of the connections are tightly secured.
- Only one person at a time should use the machine.
- If the user experiences dizziness, nausea, chest pain, or any other abnormal symptoms, STOP the workout at once. CONSULT A PHYSICIAN IMMEDIATELY.
- Position the machine on a clear, levelled surface. DO NOT use the machine near water or outdoors.
- Always wear appropriate workout clothing when exercising. DO NOT wear robes or other clothing that could become caught in the machine. Sporting shoes are recommended when using the machine.
- Do not place any sharp object around the machine.
- Disabled persons should not use the machine without a qualified person or physician in attendance.
- Never operate the machine if the machine is not functioning properly.

- Only carry out training work on the equipment when it is in perfect working order. Only use
 original spare parts in the event of a repair.
- Do not use strong solvents for cleaning, and only use the tools supplied, or suitable ones of your own, for any repairs that may be required. Please dispose of the packaging and any parts that have to be replaced subsequently (all parts for the unit) at suitable collecting points or containers with a view to saving the environment.
- DO NOT extend the seat stem past the warning line "Max" when adjusting the seat height.
- Not for therapeutic use.

WARNING: Before beginning any exercise program, consult your physician. This is especially important for persons with pre-existing health problems. The seller assumes no responsibility for personal injury or property damage sustained by or through the use of this product.

SERVICE HINTS: The high quality standard of this product only will be kept if you on a regular basis check all screw-connections and moving parts on proper fitting. Damaged parts have to be changed immediately. During the time of repair the product must not be used by anybody.

IMPORTANT HINTS:


- A) This product has been tested in accordance with the requirements of EN 957-1/A1, EN 957-5, standard, Class HA (HOME USE). The maximum load is limited to 125KGS.
- B) Parents should be aware of the risk factor of young children playing on fitness equipment unattended. Make sure that the children are instructed properly in the use of the product and in the controlled execution of the different exercise. Misuse of the product could result in serious injury

User Weight Capacity:	125KG
Dimensions:	107 x 26 x 84 CM
Shipping Weight:	51KG
Net Weight:	46 KG
Power Requirements	N/A

PRODUCT SPECIFICATIONS


ASSEMBLY INSTRUCTIONS



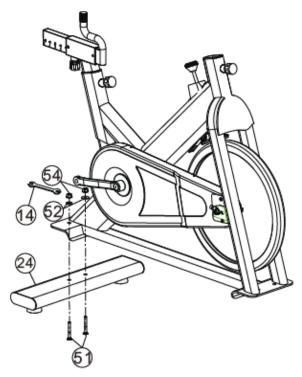


Attach the Rear Stabiliser (24) to the frame using two Carriage bolts (51), two Flange Nuts (54) and two Washers (52). Secure firmly using the Multi Wrench (14).

STEP 2

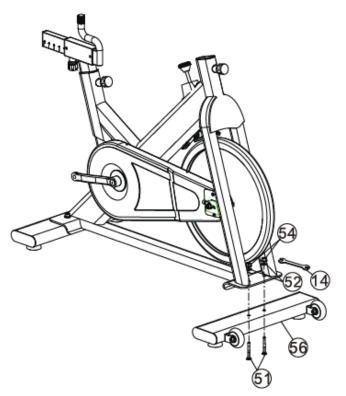


Attach the Front Stabiliser (56) to the frame using two Carriage bolts (51), two Flange Nuts (54) and two Washers (52). Secure firmly using the Multi Wrench (14).

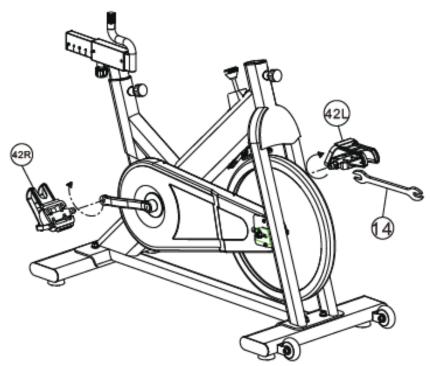

Thread the right pedal (42R) that has "R" on the spindle to the right side arm of the bike using the Multi-Wrench (14). Please note that the R pedal is right hand threaded which needs to be turned clockwise to tighten.

Thread the left pedal (42L) that has "L" on the spindle to the left side arm of the bike using the Multi-Wrench (14). Please note that the L pedal is left hand threaded which must be turned anti-clockwise to tighten.


STEP 4

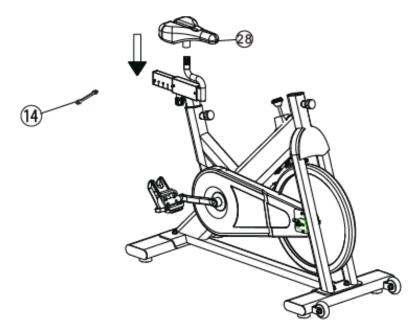

Attach the Seat (28) to the Seat slider (26) with two M8 Hex Nuts, and secure firmly using the Multi- Wrench (14). Make sure that the nose of the Seat is pointing straight ahead before you tighten the Hex Nuts.

Note: The M8 Hex Nuts may be pre-attached to the seat clamp.


STEP 5



Align the Handlebar as shown in the diagram.

Locate the Adjustable Pop Pin on the front of the Frame. Loosen the knob and pull it outward. Then, insert the Handlebar (25) into the frame. Move the Handlebar (25) upward or downward to place at the desired position, and then tighten the knob.

STEP 5



Take out water bottle holder (36) from styrofoam packaging and uncrew 2 self tapping screws (12) from frame by allen wrench.

Fix water bottle holder to frame with 2 self tapping screws (12) and an Allen wrench (57).

CONGRATULATIONS

Assembly of your **Elite Pershing Spin bike** is now complete! Be sure to fully inspect your machine before using it for the first time.

Failure to visually check and test and tech the assembly before use can cause damage to the **Elite Pershing Spin bike** and serious injury to users and bystanders and can also compromise the effectiveness of your exercise program.

SETTING YOUR SPIN BIKE UP



Saddle Height Adjustment

Having your bike seat adjusted to the right height is essential for a comfortable ride, efficient pedalling and avoiding injury. There are 2 adjustments located on the seat post. The first is a vertical height adjustment, the second is for horizontal seat position. Although there are many methods and opinions on the optimal saddle setting, the following is a quick an easy method to get started. Further adjustments can be made afterwards to optimise your position and comfort.

Saddle Height Adjustment

- Place your heels on the bike pedals and pedal backward. Your legs should be fully extended with your knees straight. If your hips rock from side to side while pedalling backward, the seat is too high.
- Place the ball of your foot on the pedal.
 There should now be a slight bend in your knee when the pedal is at its lowest point.
 This is a good starting point.

Adjusting the Seat Fore-and-Aft Position

Adjusting the Seat Fore-and-Aft Position

Once you've adjusted seat height, it's time to find the correct fore-and-aft position of the saddle. This determines where you sit in relationship to the crank set (where the pedals are attached), which helps decide how comfortable and efficient you'll be when riding. This also minimises stress to the knee by being in a more neutral position.

If you want to try to check the fore-and-aft setting at home, you will need a second person and a plumb line (a length of string with a nut or washer tied on the end will work fine).

Whilst sitting on the seat saddle bring your right crank arm around and have your helper stop the crank when the pedal is at three o'clock or parallel with the floor. Note that for this measurement to be accurate, your shoes must be correctly positioned on the pedals (the balls of your feet should be over the pedal axles).



Holding this position, have your helper place the end of the plumb line (line of string with nut/washer) on the front of your leg, at a point just below the bony protrusion that's beneath the kneecap.

The plumb line's weight should hang over your shoe. Check again to ensure that the crank-arm and pedal are level. By looking at the plumb line the knee should be in alignment with the centre spindle or axle of the pedal. Adjust the saddle to the correct position then tighten the locking pin.

Handle Bar Adjustment

The positioning of the handlebars can be dependent on the bike design and adjustability available.

To minimise back strain, adjust the height to a level that is comfortable for you. We recommend the handlebars be positioned at the same height level as the bike seat as a good starting point.

Please note: The spin bikes shown in the 'setting up your spin bike' section are for demonstration purposes only and your spin bike my vary in aesthetics and features.

Before cleaning or carrying out any maintenance on your spin bike, ensure the power is turned off and the power cord removed from the plug socket.

Prolong the life of your spin bike by performing periodic maintenance checks. Not only does this ensure your machine is in full working order to ensure they continue to run smoothly and reliably, but it will save you service costs in the long run.

- General cleaning of the unit after use will protect the bikes powder-coated framework and prevent unnecessary corrosion stains and damage to the structural components from sweat and perspiration.
- Check all nuts and bolts securing the framework, seat and handlebar assemblies are tight.
- Ensure the pedals are securely attached to the crank arms. When tightening pay attention to the reverse thread (tightening Anti-clockwise) on the left hand pedal assembly, when sitting on the bike. Be careful not to strip or force the pedal thread when tightening.

Friction Brake Pad System

Where a felt-type brake pad system is used, periodically lubricate the pad with a silicone based spray to prolong it's service life. Do NOT use WD40 or similar lubricants. Ensure the contact surface on the flywheel is kept clean and free of debris and sweat.

If a leather material brake pad is used, no lubrication is required.

NOTE: DO NOT ATTEMPT TO OVERTIGHTEN THE TENSION DIAL ADJUSTMENT, OVER TIGHTENING MAY CAUSE DAMAGE TO THE SHAFT THREAD.

Magnetic Braking System

If you have a magnetic spin cycle, there is normally no adjustment necessary as they use a low maintenance non-friction resistance system. Periodically check the movement of the magnetic brake via the cable level or tension dial to ensure it does not come into contact with the rotating flywheel at any time. The flywheel surface should be kept clean and free of dust debris and sweat.

Chain Driven

The chain will require periodic lubrication of the chain to maintain a smooth and quiet motion. The chain guard may need to be removed to perform this procedure. You may wish to put a drop sheet or similar under your bike to protect your floor coverings.

Before lubricating the chain, use an old rag to remove any old oil or residue from the chain. Lightly apply a chain or multipurpose oil to the chain. Secure the chain guard before using your bike.

Belt Driven

Belts do not require lubrication, however through normal wear and tear they may stretch and require forward adjustment of the flywheel to increase the belt tension if any slippage occurs. The adjustable tension bolts are normally found attached to the flywheel axle. DO NOT over-tighten, only enough to stop any slipping of the belt drive system.

If you require further assistance or advice contact the Elite Fitness Service Department or your nearest Elite Fitness Store.

MAINTENANCE LOG

Prolong the life of your spin bike by performing periodic maintenance checks. Not only does this ensure your machine is in full working order, but it will save you service costs in the long run.

Every time you perform maintenance, record the date and if you can, the distance and hours operated.

	DATE	NOUDE	DISTANCE	MECHANICAL MAINTENANCE		FRAME		SERVICE
	DATE	HOURS	DISTANCE -	Brake	Chain / Belt	Cleaned	Seat / Pedals	COMMENTS
eg:	01/06	15	16.5km	ſ	ſ	ſ	ſ	none

LIMITED WARRANTY

Warranty Range

Damage in correct maintenance and normal operations (not factitious factors). Warranty card to the original purchaser, shall not be transferred.

Warranty Time

HOME USE

- 10 Year Frame
- 1 Year Parts and Labour

The following conditions are not under warranty range:

- A) As a result of abuse, neglect, accident, or unauthorized modification;
- B) The damage due to incorrect assembly or adjustment of the machine;

The Spin bike should not be:

- A) Plugged into a multi-board plug device. The spin bike requires a dedicated power circuit and should be plugged directly into the wall socket.
- B) Used with an extension cord any longer than 1.5m.


Repair and Maintenance Service

Please contact our Elite Fitness Service Department at <u>eliteservice@elitefitness.co.nz</u> or visit www.elitefitness.co.nz for any service related issues or advice on preventative maintenance servicing procedures.


WARM-UP EXERCISE

Warm up exercise is important in preparing the muscles for activity whilst minimising the risk of injury. You may choose to warm up with a light/brisk walking pace for 5-10 minutes before stopping and performing some simple stretches. (As shown in the pictures below)

- Hamstring Stretch (Standing) Keep your knees slightly bent and slowly lean forward, back and shoulders relaxed, reaching towards your toes. You should feel the tension and slight discomfort in your hamstring muscles. Hold for 15-20 seconds. Repeat 2-3 times.
- Hamstrings Stretches (Seated) Sitting on the floor preferably on a mat, put one leg straight, the other inward and close to the inside of the straight leg. Lean forward from the hips, reaching towards your toes. Hold for 10-15 seconds, and relax. Repeat 3 times for each leg (See picture 2).
- Crus and Feet Tendon Stretches Standing with two hands on the wall or tree, one leg behind. Keeping your legs straight and the heel on the ground, lean forward towards the wall or tree. Hold for 10-15 seconds, and relax. Repeat 3 times for each leg (See picture 3).
- Quadriceps Stretches Keeping your balance with your left hand holding onto a wall or stationery fixture, grasp your right foot with your right hand and stretch your right heel toward your buttocks slowly, until you feel the stretch in the front of your thigh. Hold for 10-15 seconds, and relax. Repeat 3 times for each leg (See picture 4).
- Sartorius (Inner Muscles of the Thigh) Muscle
- Stretches Sitting down with the soles of your feet or shoes together and your knees positioned outward. Pull your feet towards your groin until you can feel the stretch. Hold for 10-15 seconds, and relax. Repeat 3 times (See picture 5).

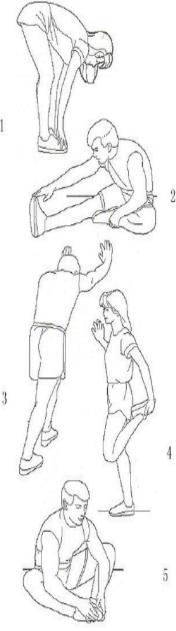

TRAINING STAGES

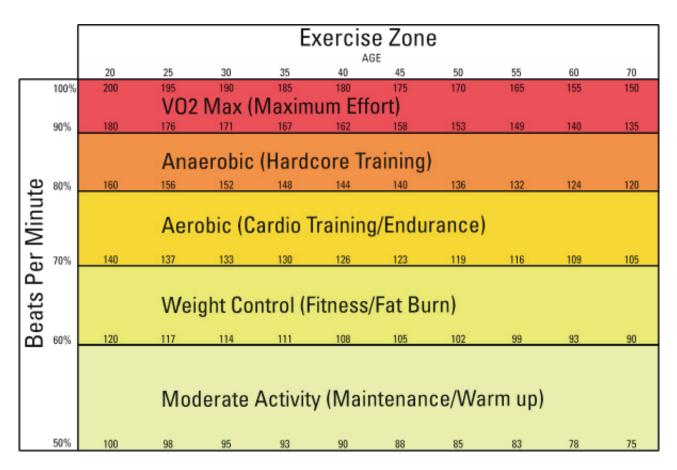

Cardiovascular training plays an important part in maintaining a healthy heart and lung function, so it's no surprise we should be paying attention to how quickly our heart beats during exercise. The chart above outlines a range of heart rate training zones determined by the individual's age and workout goals to ensure you train safely and effectively.

Heart Rate can be measured by using the radial (wrist) or carotid (neck) pulse using your index and middle fingers, counting the beats for 10 seconds and multiplying by 6. Alternatively, the use of a Wireless Telemetry Heart Rate strap and watch will give you an accurate Beats Per Minute (BPM) reading.

220 – AGE = TMHR (Theoretical Maximum Heart Rate)

TMHR x 85% = (Upper Training Limit) bpm (Beats per Minute)

TMHR x 65% = (Lower Training Limit) bpm


Note: Contact heart rate may provide innaccurate readings and is designed only as a guide

Example: 220 – 39 = 181 bpm

181 x 85% (0.85) = 154 bpm (Upper Training Limit)

181 x 65% (0.65) = 118 bpm (Lower Training Limit)


We recommend 2 people assist in assembling this unit. Place all parts of the spin bike in a cleared area and remove the packing materials. Do not dispose of the packing materials until assembly is completed. Before you start installation, inspect and prepare all parts and screws featured in this manual. When you open the carton, you will find the following parts:

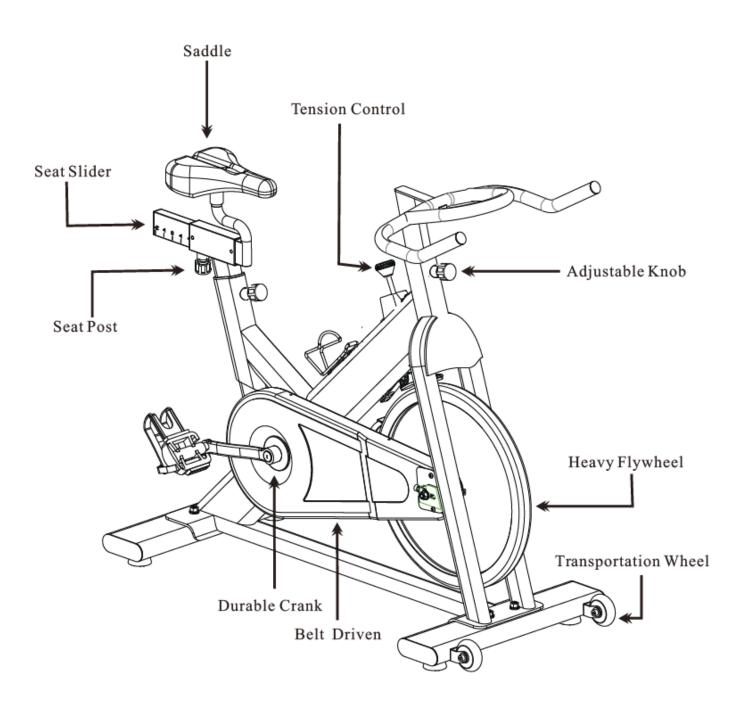

PARTS LIST

Part	Description	Quantity	Part	Description	Quantity
1	Main Frame	1	32-1	Washer	2
2	Sleeve (handlebar, seat po	ost) 2	32-2	Flange Nut	2
3	Adjustable Pop Pin	2	33	Clamp	1
4	Allen Bolt	2	34	Magnet	1
5	Allen Nut	2	35	Flywheel	1
6	Tension Control	1	36	Water Bottle Holde	r <u>1</u>
7	Square Washer	1	37	Outer Chain Guard	1
8	Helical Compression Spri	ng <u>1</u>	38	Belt	1
9	Square Nut	1	39	Big Pulley	1
10	Spacer	1	40		
11	Cap Nut	1	40-1	Bottom Bracket	1
12	Self tapping Screw	2	40-2	Crank Bolt	2
13	Resistance Cover	1	41R	Crank (R)	1
14	Multi Wrench	1	41L	Crank (L)	1
15	Self tapping Screw	1	41-1`	Crank Cap	2
16	Cover (chain guard)	1	42L	Left Pedal	1
17	Beam	1	42R	Right Pedal	1
18	Rubber Absorber	1	43	Self tapping Screw	7
19	Phillips Screw	2	44	Allen Bolt	6
20	Washer	6	45	Allen Bolt	2
21	Locked Nut	2	46	Spring Washer	6
22	Brake Pad Assembly	2	47	Locked Nut	6
23	Adjustable Pop Pin	2	48	Inner Chain Guard	1
24	Rear Stabiliser	1	49	Transport Wheels	2
25	Handlebar	1	50	Leveling Feet	4
26	Seat Slider	1	51	Carriage Bolt	4
27	Seat Post	1	52	Washer	8
28	Saddle	1	53	Allen Bolt	2
29	Short Sleeve 2		54	Flange Nut	4
30	End Cap (Seat Slider) 1		55	Locked Nut	2
31	Flange Bolt Cover	1	56	Front Stabiliser	1
32	Hub	1	57	Allen Wrench	1

EXPLODED DRAWING

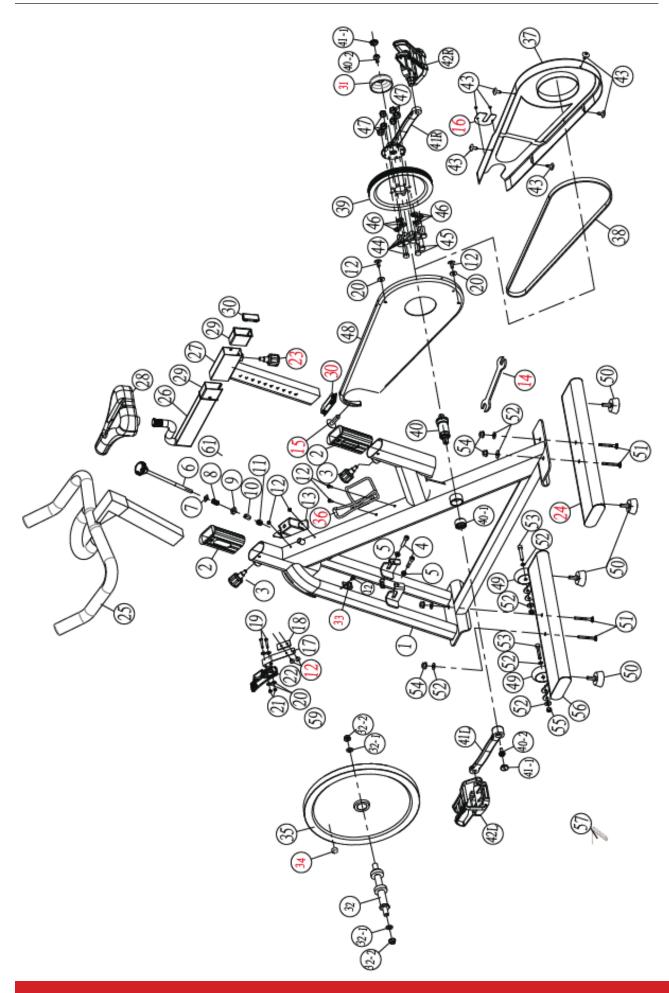



For more information about our Elite exercise equipment or other brands that we stock for your home, visit www.elitefitness.co.nz

Copyright © 2017 Elite Fitness

Elite Fitness, 11 George Bourke Drive, Mt Wellington, Auckland, New Zealand, 0800 243 834, www.elitefitness.co.nz

Keep up to date with the latest products, competitions and equipment, follow us on our social media sites.

